

Tideway®

Multi-Stage Pump

MS4-7.5x5
(880203009)



MS4-7.5x5
c/w
Press Control



Applications:-

- *** Air-conditioning system.
- *** Cooling system.
- *** Water treatment(Water purification).
- *** Domestic water supply.
- *** Industrial cleaning, conveyance and circulation of liquid
- *** Boosting entironment.
- *** Many other special using.


Working conditions:-

- *** Diluted, clean, non-flammable and non-explosive
- *** Liquid without solid grains or fibers
- *** Liquid temperature:
 - Low temp. : -20°C ~ +15°C
 - Std. temp. : +15°C ~ +70°C
 - High temp. : +70°C ~ +104°C
- *** Max. environmental temp. : 50°C
- *** Max. operating pressure : 10bar
- *** Max. suction pressure is limited by max. operating pressure

Motor:-

- *** Single phase with input thermal protector
- *** Insulation class : F
- *** Protection : IP55
- *** Continuous duty


Performance curve

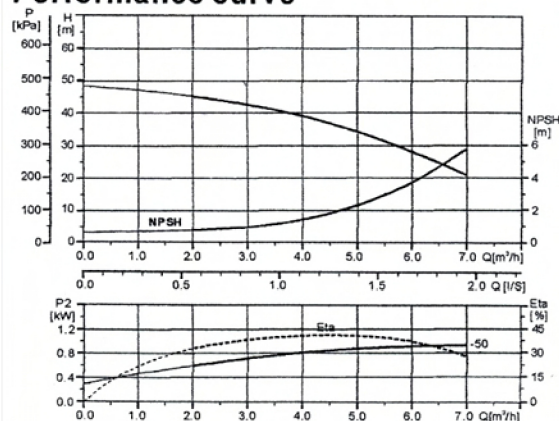

Performance table

Model	Driving motor P ₁ (kW)	Q (m³/h)	2.0	3.0	4.0	5.0	6.0	7.0
MS4-7.5x5	1.0	H (m)	44	41	38	32	26	20

Contour dimension

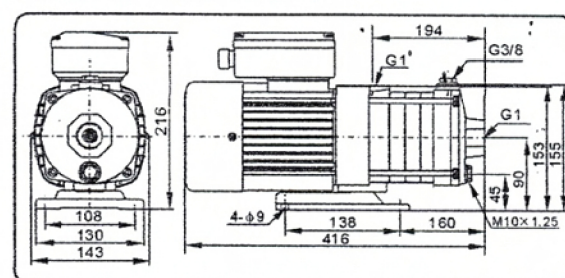

Power : 1.0 kW/6.2A

Voltage : 240V/50Hz

Speed : 2900rpm

Std. Head : 38m

Std. Flow : 4m³/h

Carton Dimension : (480 x 175 x 255)mm

***Product's specification subject to change without further notice.

***Actual product may slightly differ from pictures shown.