

Tideway


PNEUMATIC DIAPHRAGM PUMP

(GMB-25 1")




Stainless Steel

Air Consumption (m³/h)

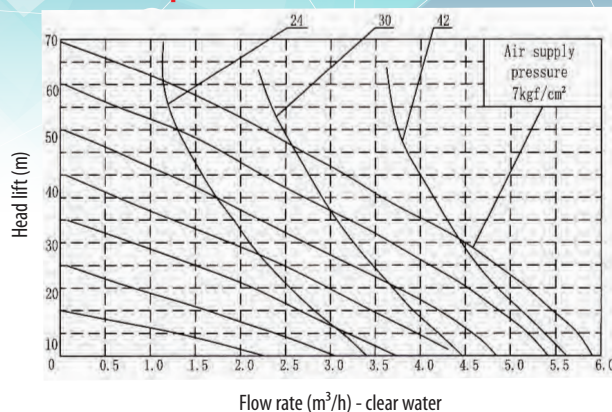

Installation Dimension

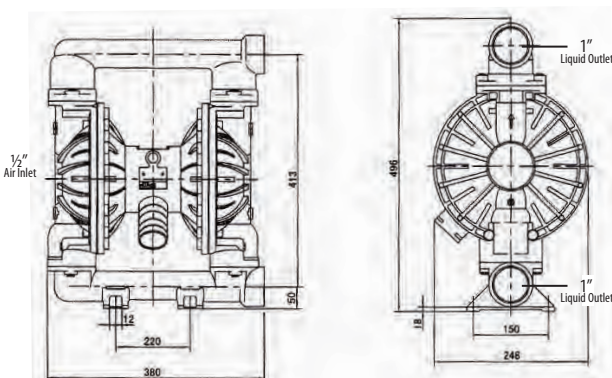

Technical Parameters

Max. Flow Rate		0 - 6.0 m³/h	
Max. Lift head		0 - 70 m	
Outlet pressure		0 - 7 kgf/cm²	
Suction lift		0 - 5 m	
Allowable diameter of grains passing		0 - 2.5 mm	
Air supply pressure		0 - 7 kgf/cm²	
Air consumption		0 - 600 L/min	
Inlet		½ inch	
Outlet		¾ inch	
Net weight		Polypropylene - 10 kg	
		Aluminum - 12.5 kg	
		Stainless Steel - 19.5 kg	
Gross weight		Carton packaging, plus : 1.5 kg	
881218016A - GMB2A-25B	881218017A - GMB2S-25TFF	881218018A - GMB2P-25TFF	881218019A - GMB2A-25TFF

*** Product's specification subject to change without further notice.

*** Actual product may slightly differ from pictures shown.

ESM411 - GMB25
(27/07/19)