

Clean Water Pump

- Adaptive sliding stamped bronze impeller can be self-regulated to make pump run quietly.
- High-grade bearings can withstand long time's continuous operation.
- Super self-suction saves up 20% self-suction time compare to the old types.
- Ideally designed pump channel makes the pump efficiency increase by up 25%, while the pump is also more energy efficient.
- The motor is designed in compliance with CCC, CE standard coupled with overheat protection, ground disposition and waterproof fittings.
- Motor cover inserts brass/stainless steel kits to avoid impeller blocking by rust.
- Pump is equipped with stainless steel shaft for a rust protection.
- New design plastic inlet flange with check valve presents the troubles from installing the foot valves.
- Powerful motor is equipped with 60mm stator can meet the different applications in household areas.



www.eikseng.com.my

Stock code:-

881204018 PSA60


881204019 PSA65

881204020 PSA70


PSA 60
65
70

性能曲线图 PERFORMANCE CURVE


流量-扬程(Q-H)曲线图

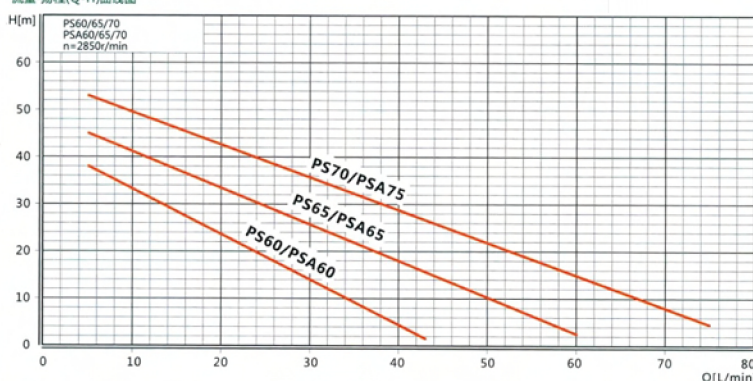

流量-效率(Q-η)曲线图

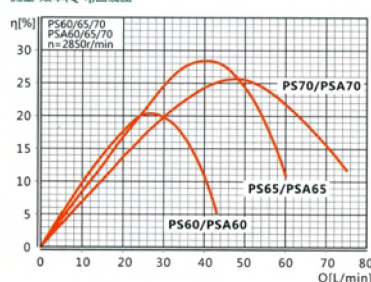

流量-功率(Q-P)曲线图

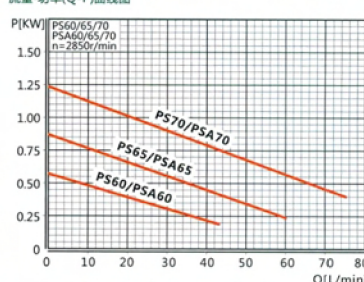


IT IS A GOOD PARTNER FOR SOLAR WATER HEATER

*** Domestic water supply.

*** Irrigation and animal husbandry water supply.

*** Mating with machinery.

PSA 系列安装尺寸图 SERIES INSTALLATION DIMENSIONS

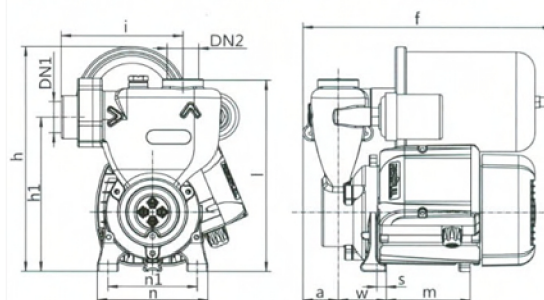

型号 Model	DN1	DN2	主要安装尺寸 Dimensions (mm)										
			a	f	h	h1	i	l	m	n	n1	w	s
PSA60	G1	G1	37	263	239	164	129	204	89	117	94	51	10
PSA65	G1	G1	37	272	265	185	137	231	95	140	114	59	10
PSA70	G1	G1	38	274	270	200	149	244	96	140	114	58	10

性能参数表 PERFORMANCE DATA

型号 Model	输入功率 Power (P1)	电流 Current	最大流量 Flow max	最大扬程 Head max	压力范围 Switch on-off	进出口径 Inlet/outlet	最大吸程 Suc. Max	额定转速 RPM	最佳工况点 Optimal working point
PSA60	0.33KW	1.6A	43L/min	38M	1.2-2.2Bar	G1XG1	9m	2850min ⁻¹	26L/16M
PSA65	0.55KW	2.5A	60L/min	45M	1.4-2.4Bar	G1XG1	9m	2850min ⁻¹	38L/20M
PSA70	0.75KW	3.4A	75L/min	53M	1.6-2.8Bar	G1XG1	9m	2850min ⁻¹	48L/24M